

PSCP

PS Automation 
Gesellschaft für Antriebstechnik

We care for actuation.

Linear actuators PSL-AMS 2 kN - 25 kN with Power Fail-Safe Device PSCP

Most industrial facilities are not equipped with secondary electrical circuits and emergency power supplies. Blackouts as they frequently occurred in recent years do not only mean a loss of productivity but also a loss of control. If the production in the process industry and in some processes of discrete manufacturing stops without control, that may spoil the complete production batch. Failures in cooling or heating supplies may disrupt all work flows in utility systems. And they may evoke dangers for employees or environment.

Mode of functioning

The capacitor-based energy storage is powerful and maintenance free. As soon as the actuator's electronics recognises a main power failure, it instantly switches its own PSCP energy pack and the actuator moves towards the valve's preset safety position. This happens safely with preset thrust or torque and speed. A potential-free relay contact is available that delivers the information about emergency positioning to the control room.

The PSCP is designed for above 500.000 load cycles.

Benefits

- Maintenance-free operation without the familiar battery „memory effect“
- High durability based on long-term experience in various applications
- High number of life cycles and load capability due to a low internal resistance, full force is available at all times
- Very good tolerance to low temperature
- Recharging within a few minutes without losing capacity, therefore the actuator is quickly made ready for a new emergency cycle

A PSL-AMS is compact and modular

The PSL-AMS linear actuators from PS Automation are available for forces from 1 kN to 25 kN. They are mature and proven, robust and completely maintenance free.

A PSL-AMS is installed fast and is programmable due to the local control with display, alternatively via the USB-interface.

The automated one-key commissioning is standard.




PSCP

PS Automation 
Gesellschaft für Antriebstechnik

We care for actuation.

Dimensions and technical data

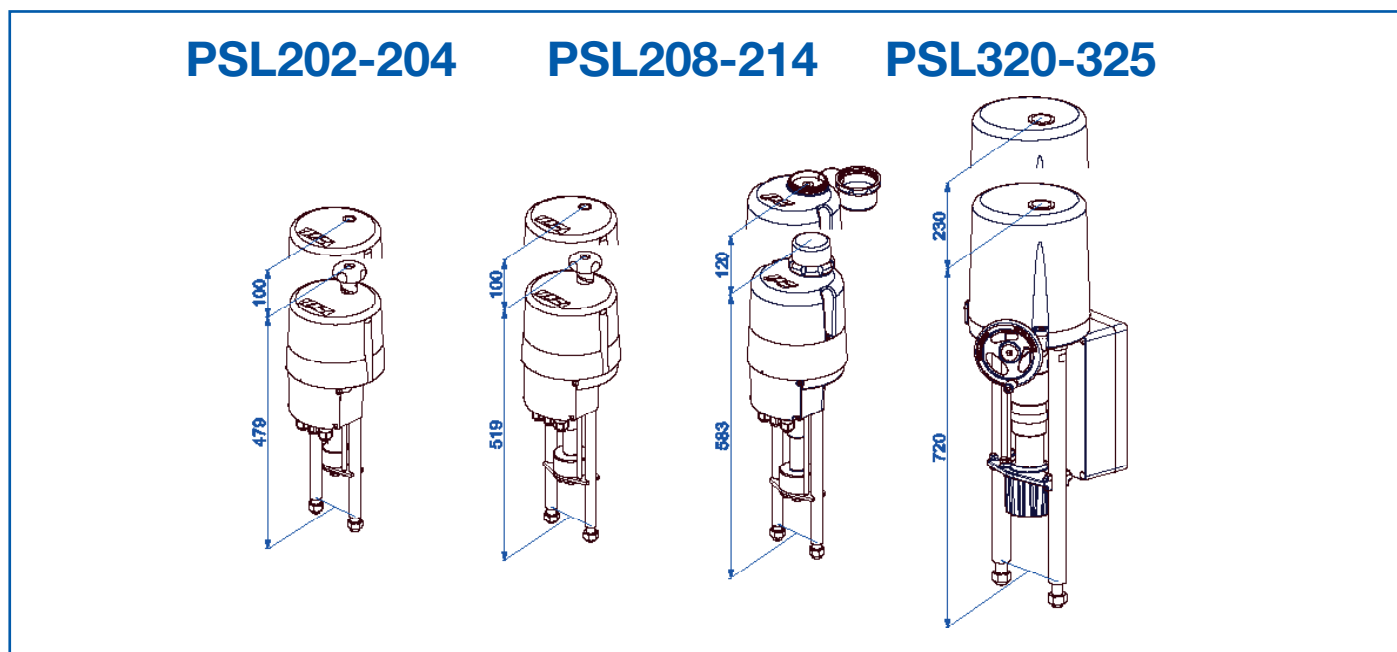

Intelligent linear actuators		PSL202 AMS11	PSL204 AMS11 AMS12	PSL208 AMS11	PSL210 AMS11 AMS12	PSL214 AMS12	PSL320 PSL325 AMS13
Thrust	kN	2,3	4,5	8	10	14	25
	Lb _f	520	1010	1800	2250	3150	5600
Stroke s	mm	50	50	50 opt. 65	50 opt. 65	50 opt. 65	60 100 (24V)
Pillar distance	mm	100	100	100	100	100	155
Velocity	mm/s	0,45 - 0,9	0,45 - 0,9	0,3 - 0,7	0,2 - 0,35	0,65 - 1,3	0,2 - 0,4
			2,25 - 4,5		0,85 - 1,7		
Enclosure acc. to EN 60529 (PSCP)		IP65*		IP67			IP65
Cover material		Polycarbonat or cast aluminium			Cast aluminium		
Gear case material		High quality aluminium die casting					
Motor voltages		24 VAC+DC / 115 V / 230 V / 50-60 Hz					
Motor protection		Electronic motor current monitoring with safety cut-off					
Duty cycle as per IEC 60034-1,8		S2 30min, S4 1200 c/h - 50% duty cycle					
Permitted ambient temperature		-20 to +55°C					
Control options (standard)		Analogue signal, split range, 24 V binary					
Input and Output signals		0 (4) - 20 mA, 0 (2) - 10 V					
Mounting position		Any position, except cover pointing downwards					
Manual override		Handwheel knob					Handwheel

* optional IP67

PS Automation GmbH
Gesellschaft für Antriebstechnik

Philipp-Krämer-Ring 13 • D-67098 Bad Dürkheim
Tel.: +49 (0) 63 22-60 03-0 • Fax: +49 (0) 63 22-60 03-20
info@ps-automation.com • www.ps-automation.com

Engineered and Made in Germany

